

Company: _____

Date: _____

Contact: _____

Job name: _____


Address: _____

Email: _____

City: _____ State: _____ Zip: _____

PO#: _____ AG Salesperson: _____

Model | Handing (viewed from exterior):

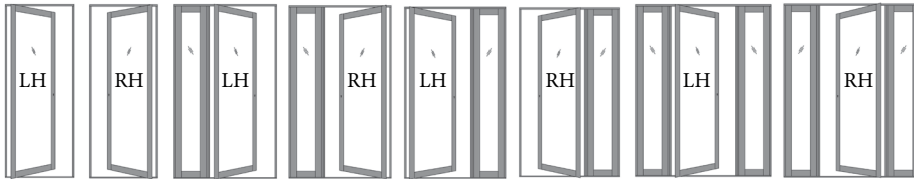

Door style: _____

Net O.D of frame _____

Door size: _____

Sidelite size: _____

Door thickness: 2 1/4

Sidelite thickness: 2 1/4

Material: Clad/Wood Wood/Wood (Accoya Only)

Wood species: Paint-grade Pine Stain-grade Pine PG Vertical Grain Douglas Fir
 SG Vertical Grain Douglas Fir Walnut Clear Alder Knotty Alder African Mahogany
 Sapele Mahogany Genuine Mahogany Cherry White Oak: (Flat grain Quarter Sawn Rift Sawn)
 Red Oak Accoya Wood: (Wood/Wood - 5 Year Warranty - Paint or Stain) Paint-grade Basswood Stain-grade Basswood


PLEASE NOTE: ALL WOOD DOORS MUST MEET WARRANTY SITE CONDITION REQUIREMENTS

Exterior clad color: Carbon Black Espresso Brown Sandcastle Tan Linen White Clear Anodized


Door style & type of Dual Glaze Cardinal Glass:

Sidelite style & type of Dual Glaze Cardinal Glass:

LoE 366 w/Argon (Standard)
 272 w/Argon
 Other: _____ (Up-charge applies)
 Add i89 coating (Up-charge applies)



LoE 366 w/Argon (Standard)
 272 w/Argon
 Other: _____ (Up-charge applies)
 Add i89 coating (Up-charge applies)



One Lite

Draw design here



One Lite

Draw design here

Energy Performance LoE 366 with Argon (Clad): Slimline .29/.20 | Euro .30/.19 | Traditional .30/.17

Lite Configuration: SDL: 1 1/8" 7/8" 5/8" Horizontal Intermediate Rails: 2 1/2 4 1/4

SDL Shapes: Ovolo Bevel Square Sticking/Stops: Ovolo Bevel Square



Spacer Color: Black Mill


Weather Strip Color: Bronze White

NOTE: Screen not available on In-Swing Doors

Minimum OA Jamb 6½"


Stiles & Rails: may vary based on hardware

Slimline: 2 ½" Top rail/bottom rail/stile & 3-7/16" lock rail




Slimline

Euro: 3-7/16" Top rail/stiles/bottom rail




Euro

Traditional: 4 ¾" Top Rail/stiles

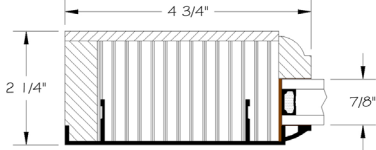


Traditional

Bottom Rail: 7" or 4 ¾"

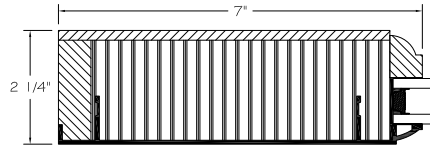


Traditional

Euro Details: 4¾"

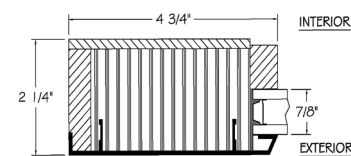


ADA Aluminum Sills (PLEASE NOTE): No warranty for water penetration for ADA Sills



Dark Bronze

Clear Anodized

ADA Flat Grain White Oak Sills



(PLEASE NOTE: Sill pans, nail fins, and other waterproofing measures are required for proper installation of all products)

Flashing Fin: No Yes 1 ½" - Standard 1" Setback

Multi-Point Lock: Exterior Key

2" Back Plate / Thumb Turn:

Round Square

Black Satin Nickel

Roller Latch:



exterior access

Pull handle by Others

or

Lever: Dallas (not used with handle pull)



Matte Black

Hardware Options:

FritsJurgens System One
Free Swing

FritsJurgens M + 32
Self Closing

Stainless Steel

Dorma LM Series
Free Swing

Pivot Plate Finish:

Matte Black

Satin Nickel

***Prime:** No Yes (Up-charge applies)

***Paint:** No Yes Custom color*: _____ (Up-charge applies)

***Pre-finished Stain:** No Yes Standard color: _____

Custom color*: _____ (Up-charge applies)

*Special order which may delay lead time by 2 weeks

NOTES: Please add any special instructions here:
